

# ZD-8922



## Features:

- ⊙ Ideal for soldering and desoldering all types of surface mounted IC, PCB or components.
- ⊙ Dual LCD readout simultaneously displays the temperatures of the soldering station and the SMD rework station.
- ⊙ Push button up/down for temperature setting.
- ⊙ Adjustable hot air volume from 3L/min to 24L/min continuously.
- ⊙ Micro-processor controlled and adjustable temperature.
- ⊙ Temperature range: 50-480° C for the soldering iron, 100-500° C for the hot air pump.



## Spare parts included:




## Specifications

Code	Voltage	Note
89-2201	110-130V	
89-2202	220-240V	
89-2203	110-130V	ESD
89-2204	220-240V	ESD

## Spare tips for soldering iron

Code	Model	Type
79-1917	TIP N9-16	High quality
79-1927	TIP N9-26	
79-1937	TIP N9-36	
79-1947	TIP N9-46	
79-1957	TIP N9-56	

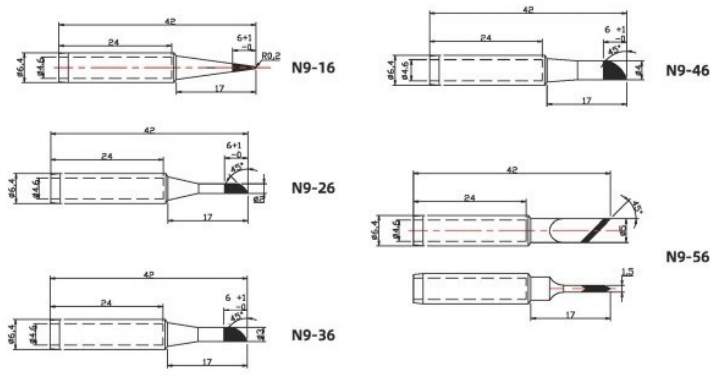

## Spare heater

Code	Voltage	Power	Use for	Note
78-415R	24V	60W	ZD-415R	with temperature probe
79-8908A	110-130V	300W	ZD-8922	
79-8908B	220-240V	300W	ZD-8922	



## Spare soldering iron

Model	Code	Voltage	Power	Note
ZD-415R	88-4155	24V	60W (Heat up rating 130W)	4 pins, no sleep function



## Sponge

Code	Size
79-7304	42x51mm



Model	Package	Q'ty/ctn	Carton Size	N.W.
ZD-8922	Gift box	4sets	43.5x28.5x28cm	10.5kgs

