

ZD-8936



Features:

- ⊙ Long lasting quick heat-up heating element.
- ⊙ With an LED digital display to show the working temperature and status.
- ⊙ This soldering station is with an innovative heater and sensor combination that provides you quick heat-up and rapid temperature recovery.
- ⊙ Ideal for continuous use with the rubber grip on the handle.




Specifications:

- ⊙ Temperature range: 50°C-480°C
- ⊙ Net weight: 1.9kgs
- ⊙ Product size: 12.5cm(H) x 11cm(W) x 15.5cm(L)

| Code | Voltage | Note |
|---------|----------|------|
| 89-3601 | 110-130V | |
| 89-3602 | 220-240V | |
| 89-3603 | 110-130V | ESD |
| 89-3604 | 220-240V | ESD |

Spare tips for soldering iron

| Code | Model | Type |
|---------|-----------|--------------|
| 79-1917 | TIP N9-16 | High quality |
| 79-1927 | TIP N9-26 | |
| 79-1937 | TIP N9-36 | |
| 79-1947 | TIP N9-46 | |
| 79-1957 | TIP N9-56 | |

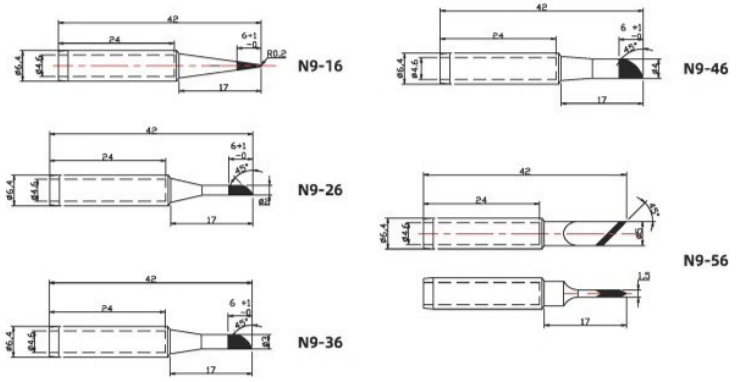

Spare soldering iron

| Model | Code | Voltage | Power | Note |
|---------|---------|---------|---------------------------|---------------------------|
| ZD-415R | 88-4155 | 24V | 60W (Heat up rating 130W) | 4 pins, no sleep function |



Spare heater

| Code | Voltage | Power | Use for | Note |
|---------|---------|-------|---------|------------------------|
| 78-415R | 24V | 60W | ZD-415R | with temperature probe |



Sponge

| Code | Size |
|---------|---------|
| 79-7304 | 42x51mm |



Color box package



| Model | Package | Q'ty/ctn | Carton Size | N.W. | G.W. |
|---------|----------|----------|----------------|------|------|
| ZD-8936 | Gift box | 4sets | 39x25.5x28.5cm | 8kgs | 9kgs |

